Office Products Division Customer Engineering

"IBM", "Executive", "Hektowriter", "IBM EXECUTARY", and "Selectric" are registered trademarks of the International Business Machines Corp.



PARTS CATALOG

GRAPHICS




Form No. 241-5645-1 (Revised) November, 1973


(Alphabetical)


	Mechanism	Code	Page	Mechanism	- C	ode Page	Mechanism	Code	Page
	MT/SC CONSOLE			"SELECTRIC" COMPOSER	3		"SELECTRIC" COMPOSER (Cont.)		
	Desk & Covers Electronic Gate Keyboard Movable Frame Permutation Unit	M78 M76 M73 M71	22 22 21 21	Backspace Bold/Light & Technical Fea Carrier Carrier Return Covers	tures	921 4 910 1 952 12	Pin Feed Platen Platen Power Indexing Press Wire Print Control	960 960 994	15 14 17 5
1	Power Supply Stationary Frame Translator Frame Translator Motor & Drive	M74 M72	22 21 20	Cycle Clutch		946 11 940 10 944 10	Ribbon Ribbon MT/SC Printer Rocker Selection Shift	916 916 912	2 1 4 13
	PAPER TAPE READER Covers & Mounts	M66	19	Gothic Fractions		921 3 960 14 980 16	Spacebar Tabulation Type Fonts Velocity Control	956	13
	Motor & Drive Sensing Tape Feed	M64	18 18 18	Keyboard		970 16	Automatic/Manual	929	6 5
				MT/SC Printer Operational Control	**************	990 17 948 11	CHARTS		S. S. Indian
				Packing Parts & Instruction Paper Feed			Code 32 Listing		24


CODE 32 LISTING


Subject	Previous Pub.	Mech.	Ref.	Part No.	Qty.	Change Type	Appl. Code	Expiration Date	Model Name/No. & Serial No. Range
Reader Wiring Change	CEM 130	NA	NA	1160777	1	Reliability	2	None	6320 Below 10331
Warning Sticker	CEM 169	930	41	1173927	1	Safety	1	None	Modified SC Below 5022300
Bias Gear Guard	CEM 170	940	101 30	1164576 1173856	2	Safety	2	None	SC Below 5021900
Dust Shields	CEM 171	934	39 40	None		Safety	2	None	All SC
Translator Motor Grounding	CEM 172	M70	4	None		Safety	1	None	6320 Below 10067
Latch Pawl Bias Spring Guard	CEM 173	920	151	1173784	1	Safety	2	None	All SC
Keyboard Cable Clamp Reversed	CEM 196	M76	6	None		Safety	1	None	All MT/SC Mfd. Prior to 10-15-69
Electrical Outlet	CEM 200	M70	11	None		Safety	2	None	6320 Below 42947
Line Cord Replacement	CEM 228	NA	NA	See Catalog		Safety	3	None	All Equipment
Frayed Line Cords	CEM 230	930	38	See Catalog		Safety	3	None	All Modified SC's
Switches On/Off	CEM 262	930	12	1173357	1.	Safety	1	None	All SC's
Double Insulation	CEM 263	930	38	1173443	2	Safety	3	None	Austin Reapplied After April, 1971
Spade Connector	CEM 265	930		None		Safety	2	None	All SC's
Copy Holder	CEM 270	M45	1	None		Safety	1	None	All Systems
Sharp Corner On Fan Housing	Combined Safety	M01	29 38			Safety	2	None	All Tape Decks
Solderless Connectors	CEM 284	930	19	1124799	3	Safety	1	None	SC Between 5029800-5030285
Tilt Ring	CEM 312	912	300	1201738	1	Serviceability	3	9-1-74	All New Build and Recon SC Before 6-1-72
Line Cord Abrasion	CEM 315	930 934	37 38	1173445 1172113	1	Safety	2	None	All New Build and Recon SC Before 4-1-72

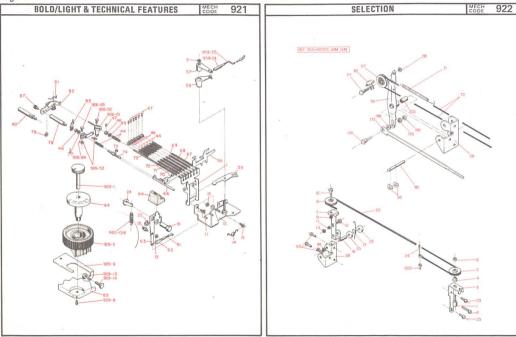













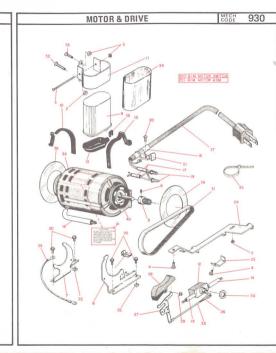



929




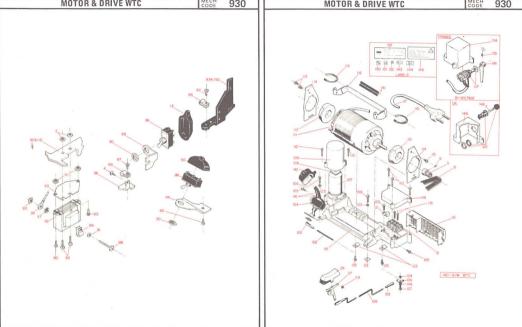










50-B/M PACKING PARTS


If a set of "Selectric" Composer packing material is not available locally, request B/M 7340221 on an inter-office memo to:

Small Parts Shipping Dept. 890 Austin Plant

PACKING INSTRUCTION:

- Make sure indicator tube is at extreme right stop and tape in position.
- B. Place a piece of foam over the interlock scale and one over the ribbon feed plate (ribbon removed) and tape the carrier at the extreme left side of Composer (shoe latched out of leadscrew).
- C. Close top cover and tape.
- D. Place the seven (7) rubber spacers in bottom of cover with thick portion outside of covers.
- E. Place plastic inserts in the rubber spacers.
- F. Secure the pallet to the machine with all seven thumb screws, inserting through pallet, plastic inserts, rubber spacers and threading into power frame.
- G. Place foam pad on bottom of pallet.
- H. Place liner around machine.
- Place bottom liner and two foam pads in bottom of carton and place machine in carton.
- Place platen knobs, dust cover and coiled line cord in rear of machine; insert top liner and seal carton.



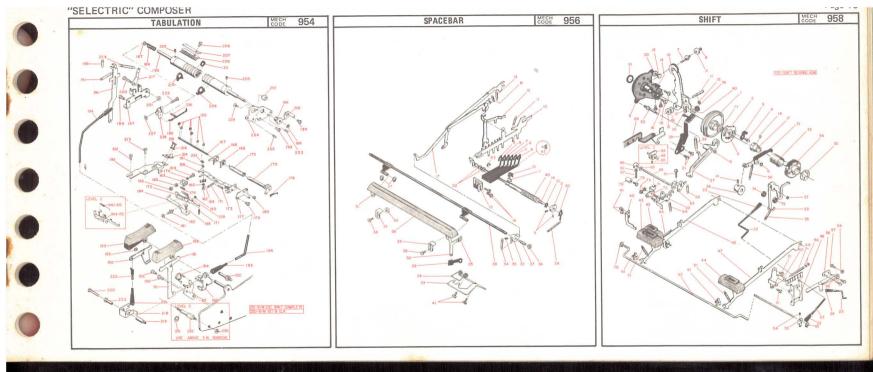

"SELECTRIC" COMPOSER

